

## PROFILE SNAKE



<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including on/off driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>SIZE</b>	See technical drawing

### OPTIONS




<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>DIMMABLE</b>	Dali dimmable
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

### INFORMATION

Including 1500mm steel wire suspension with wire length control

**Bespoke size & product features available**


Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

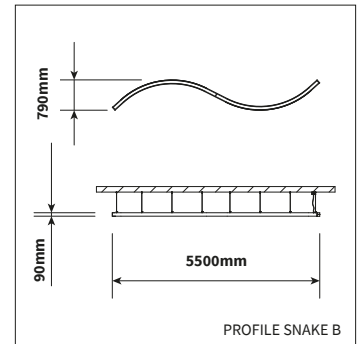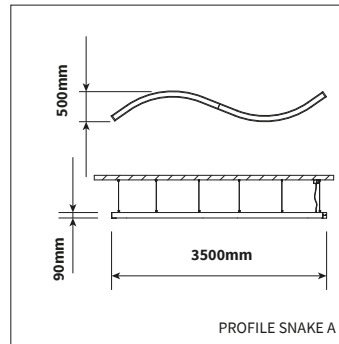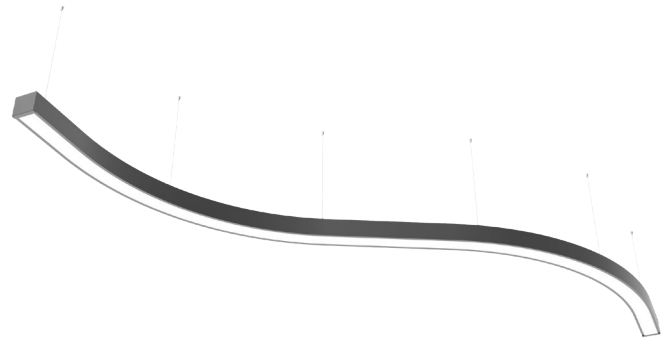

### DIFFUSER



White opalic

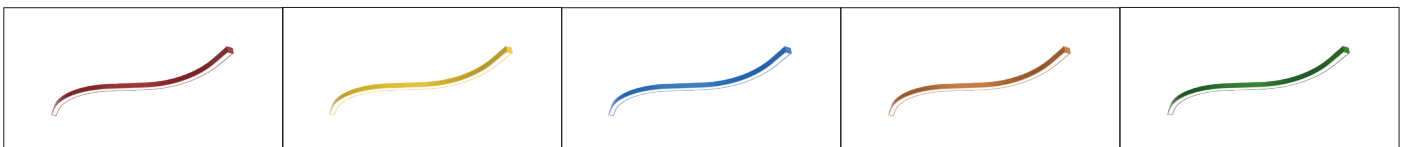

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
<b>PROFILE SNAKE A</b>								
Δ See colors								
9277.350.30.Δ	3500mm	13000lm	9000lm	82W	159lm/W	3000K	>80	50.000 Hrs
9277.350.35.Δ	3500mm	13000lm	9000lm	82W	159lm/W	3500K	>80	50.000 Hrs
9277.350.40.Δ	3500mm	13000lm	9000lm	82W	159lm/W	4000K	>80	50.000 Hrs
<b>PROFILE SNAKE B</b>								
9278.550.30.Δ	5500mm	22000lm	15000lm	133W	165lm/W	3000K	>80	50.000 Hrs
9278.550.35.Δ	5500mm	22000lm	15000lm	133W	165lm/W	3500K	>80	50.000 Hrs
9278.550.40.Δ	5500mm	22000lm	15000lm	133W	165lm/W	4000K	>80	50.000 Hrs