

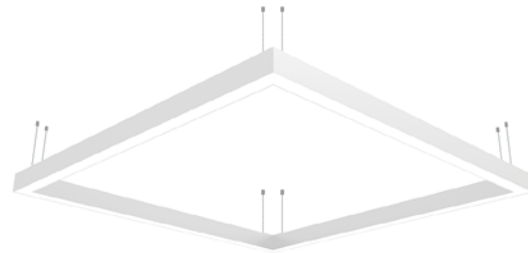


<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including on/off driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	See technical drawing

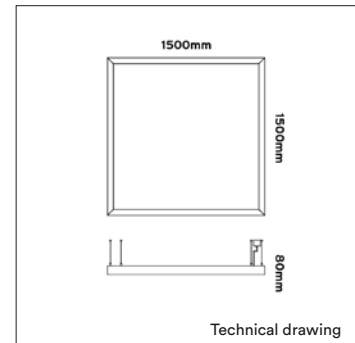

## OPTIONS


<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>DIMMABLE</b>	Dali dimmable
<b>SUSPENSION SET</b>	1500mm suspension set included
<b>DIFFUSER</b>	White opalic diffuser or Microprismatic UGR<19 option
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request
<b>WIRELESS DIMMABLE</b>	Masterconnect, Easy Air/Zigbee



## INFORMATION

- ⚠ Bespoke size & product features available
- ⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

### DIFFUSER



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
9274.150.30.Δ	1500 X 1500mm	35200lm	215W	164lm/W	3000K	>80
9274.150.35.Δ	1500 X 1500mm	35200lm	215W	164lm/W	3500K	>80
9274.150.40.Δ	1500 X 1500mm	35200lm	215W	164lm/W	4000K	>80

Δ See colors