





PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including standard Xitanium driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	Different sizes available



OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request

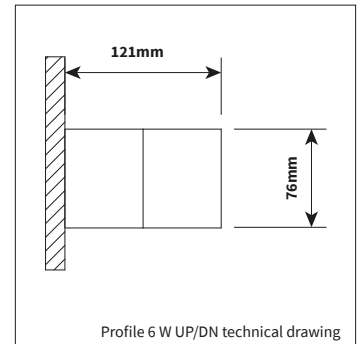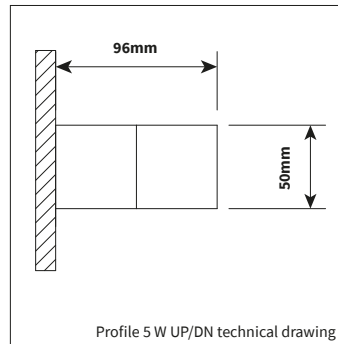

INFORMATION

Wall mounted direct/indirect LED luminaire

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER



White opal

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
PROFILE 5 W UP/DN								
Δ See colors								
9266.587.30.Δ	587mm	2200lm	1500lm	14W	157lm/W	3000K	>80	50.000 Hrs
9266.587.35.Δ	587mm	2200lm	1500lm	14W	157lm/W	3500K	>80	50.000 Hrs
9266.587.40.Δ	587mm	2200lm	1500lm	14W	157lm/W	4000K	>80	50.000 Hrs
9266.868.30.Δ	1149mm	4400lm	3000lm	28W	157lm/W	3000K	>80	50.000 Hrs
9266.868.35.Δ	1149mm	4400lm	3000lm	28W	157lm/W	3500K	>80	50.000 Hrs
9266.868.40.Δ	1149mm	4400lm	3000lm	28W	157lm/W	4000K	>80	50.000 Hrs

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
PROFILE 6 W UP/DN								
Δ See colors								
9267.587.30.Δ	587mm	4400lm	2900lm	28W	157lm/W	3000K	>80	50.000 Hrs
9267.587.35.Δ	587mm	4400lm	2900lm	28W	157lm/W	3500K	>80	50.000 Hrs
9267.587.40.Δ	587mm	4400lm	2900lm	28W	157lm/W	4000K	>80	50.000 Hrs
9267.868.30.Δ	1149mm	8800lm	5500lm	53W	166lm/W	3000K	>80	50.000 Hrs
9267.868.35.Δ	1149mm	8800lm	5500lm	53W	166lm/W	3500K	>80	50.000 Hrs
9267.868.40.Δ	1149mm	8800lm	5500lm	53W	166lm/W	4000K	>80	50.000 Hrs