


PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Osram 5050
DRIVER	Including driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	
ADJUSTABLE	No
SIZE	93 X 93 X 47mm



OPTIONS

DRIVER OPTIONS	Phase cut	Included
	1/10V	350mA 0-15W Art. no.: 0115.350.30.0
	DALI	350mA 8-19W Art. no.: 0120.350.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 1500mm 2 X 0,75	Included
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

INFORMATION

Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

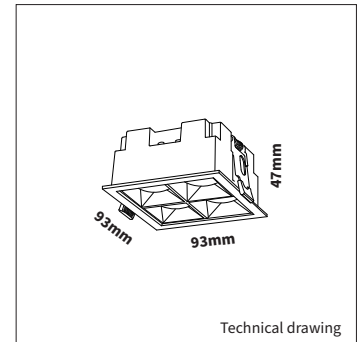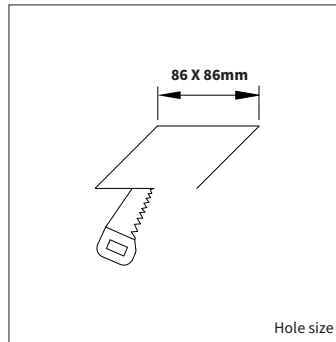

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4417.235.24.Δ	5050	Cree	1500lm	14W	107lm/W	2700K	>90	50.000 Hrs	350mA
4417.335.24.Δ	5050	Cree	1500lm	14W	107lm/W	3000K	>90	50.000 Hrs	350mA

Δ See colors