

<b>PRODUCT MATERIAL</b>	Steel and aluminium
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including DALI 2.0 driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>DIFFUSER</b>	Opalic white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	595 X 595 X75mm




**SPECIAL FEATURES**


Luminaire is equipped with EasyAir Sensor:  
 Communication between luminaires without wires.  
 Easy smartphone commissioning  
 Daylight control sensor: EasyAir sensor included  
 Movement sensor: EasyAir sensor included  
 Dimmable: DALI 2.0 driver included  
 Enables gateway data readout  
 Xitanium SR interface (based on DALI 2.0)

**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>DIFFUSER</b>	White opalic diffuser or Microprismatic UGR<19 option
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	EasyAir sensor included
<b>DAYLIGHT CONTROL SENSOR</b>	EasyAir sensor included
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

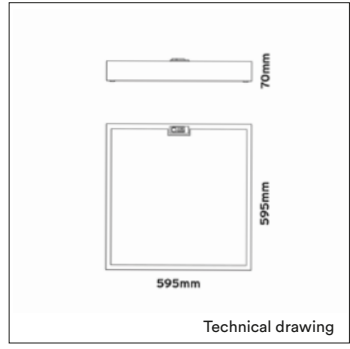

**DIFFUSER**



**INFORMATION**

Nominal lifetime L80/B10 @70.000 h / 25°C

- ⚠ Bespoke size & product features available
- ⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>OPAL</b>						
Δ See colors						
80.01030.83.XC.OP.Δ	595 X 595mm	5000lm	30W	167lm/W	3000K	>80
80.01030.81.XC.OP.Δ	595 X 595mm	5000lm	30W	167lm/W	3500K	>80
80.01030.84.XC.OP.Δ	595 X 595mm	5000lm	30W	167lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>UGR&lt;19</b>						
Δ See colors						
80.01030.83.XC.OP.MP19.Δ	595 X 595mm	5000lm	30W	167lm/W	3000K	>80
80.01030.81.XC.OP.MP19.Δ	595 X 595mm	5000lm	30W	167lm/W	3500K	>80
80.01030.84.XC.OP.MP19.Δ	595 X 595mm	5000lm	30W	167lm/W	4000K	>80

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.