






<b>PRODUCT MATERIAL</b>	Steel
<b>LIGHT SOURCE</b>	Cree / Bridgelux
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 8 = Anodic brown</li> <li>● 7 = RAL 7037 grey</li> </ul>
<b>BEAM ANGLE</b>	 24°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	255 X 80 X 95mm




Designed by  
**reny  
meijers**

<b>OPTIONS</b>							
<b>OPTIONAL BEAM ANGLE</b>	<ul style="list-style-type: none"> <li> 15° Art. no.: 3 X 4818.010.15.0</li> <li> 33° Art. no.: 3 X 4818.010.36.0</li> <li> 48° Art. no.: 3 X 4818.010.50.0</li> </ul>						
<b>HONEYCOMB</b>	Art. no.: 3 X 4818.040.00.0						
<b>DRIVER OPTIONS</b>	<table border="1"> <tr> <td><b>On/off</b></td> <td>200mA 5-8W Art. no.: 3 X 0108.200.10.0</td> </tr> <tr> <td><b>Phase cut</b></td> <td>200mA 6-8W Art. no.: 3 X 0108.200.20.4</td> </tr> <tr> <td><b>DALI</b></td> <td>200mA 6-8W Art. no.: 3 X 0106.200.40.1</td> </tr> </table>	<b>On/off</b>	200mA 5-8W Art. no.: 3 X 0108.200.10.0	<b>Phase cut</b>	200mA 6-8W Art. no.: 3 X 0108.200.20.4	<b>DALI</b>	200mA 6-8W Art. no.: 3 X 0106.200.40.1
<b>On/off</b>	200mA 5-8W Art. no.: 3 X 0108.200.10.0						
<b>Phase cut</b>	200mA 6-8W Art. no.: 3 X 0108.200.20.4						
<b>DALI</b>	200mA 6-8W Art. no.: 3 X 0106.200.40.1						

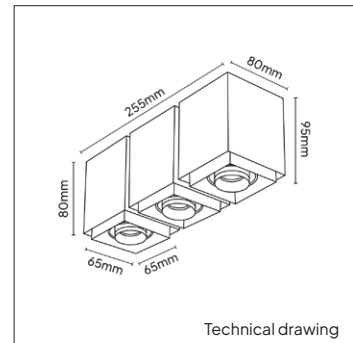

**INFORMATION**

Always select a driver option and add the selected driver to your order.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

**INSERTS**




The colors as stated above can be combined with the fixture inside and outside.

For example: Outside black (Δ=5) and inside Anodic brown (Δ=8) will be colorcode Δ=58

**HONEYCOMB**



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4814.270.24.Δ	1306	Cree	3 X 837lm	3 X 7,3W	114lm/W	2700K	>90	30.000 Hrs	200mA
4814.125.24.Δ	BXRV	Bridgelux	3 X 688lm	3 X 6,5W	106lm/W	1800-3000K 	>90	30.000 Hrs	200mA

Δ See colors