

<b>PRODUCT MATERIAL</b>	Steel and aluminium
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including DALI 2.0 driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>DIFFUSER</b>	Opalic white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	Ø500 X 280mm




**SPECIAL FEATURES**

Luminaire is equipped with EasyAir Sensor:  
 Communication between luminaires without wires  
 Easy smartphone commissioning  
 Daylight control sensor: EasyAir sensor included  
 Movement sensor: EasyAir sensor included  
 Dimmable: DALI 2.0 driver included  
 Enables gateway data readout  
 Xitanium SR interface (based on DALI 2.0)


**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>COLOR INSIDE</b> ON REQUEST	<ul style="list-style-type: none"> <li>● Gold</li> <li>○ White</li> <li>● Black</li> <li>● Aluminium color</li> <li>● Custom color on request</li> </ul>
<b>DIFFUSER</b>	White opalic diffuser or Microprismatic UGR<19 option
<b>SUSPENSION SET</b>	Suspension set 1500mm included
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	EasyAir sensor included
<b>DAYLIGHT CONTROL SENSOR</b>	EasyAir sensor included
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

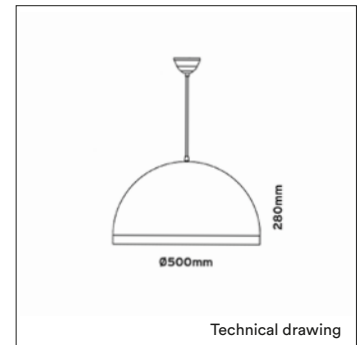

Technical drawing

**DIFFUSER**



**INFORMATION**

Nominal lifetime L80/B10 @70.000 h / 25°C

- ⚠ Bespoke size & product features available
- ⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>OPAL</b>						
Δ See colors						
70.01100.83.XC.OP.Δ	Ø500mm	5500lm	35W	157lm/W	3000K	>80
70.01100.81.XC.OP.Δ	Ø500mm	5500lm	35W	157lm/W	3500K	>80
70.01100.84.XC.OP.Δ	Ø500mm	5500lm	35W	157lm/W	4000K	>80
<b>UGR&lt;19</b>						
Δ See colors						
70.01100.83.XC.OP.MP19.Δ	Ø500mm	5500lm	35W	157lm/W	3000K	>80
70.01100.81.XC.OP.MP19.Δ	Ø500mm	5500lm	35W	157lm/W	3500K	>80
70.01100.84.XC.OP.MP19.Δ	Ø500mm	5500lm	35W	157lm/W	4000K	>80