


<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux V10B or DtW
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ <b>3</b> = RAL 9003 white ● <b>5</b> = RAL 9005 black
<b>BEAM ANGLE</b>	▲ <b>24°</b>
<b>ADJUSTABLE</b>	No
<b>DIMMABLE</b>	Yes
<b>SIZE</b>	Ø72 X 110mm



## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	▲ <b>15°</b>	Art. no.: 3067.010.15.0
	▲ <b>36°</b>	Art. no.: 3067.010.36.0
	▲ <b>45°</b>	Art. no.: 3067.010.45.0
<b>ANTI-GLARE RING</b>	<b>Black</b>	Included
	<b>Gold</b>	Art. no.: 3067.030.00.9
<b>HONEYCOMB</b>	Art. no.: 3067.040.00.0	
<b>DRIVER OPTIONS</b>	<b>1/10V</b>	250mA 1-11W Art. no.: 0111.250.30.0 This driver can only be placed externally
	<b>DALI</b>	250mA 6-13W Art. no.: 0114.250.40.1 This driver can only be placed externally

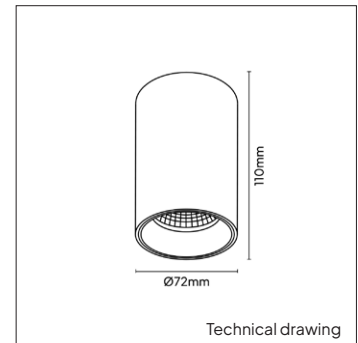

## INFORMATION

⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.

### ANTI-GLARE RING



### HONEYCOMB



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
5200.270.24.Δ	V10B	Bridgelux	700lm	10W	70lm/W	2700K	>90	50.000 Hrs	250mA
5200.300.24.Δ	V10B	Bridgelux	750lm	10W	75lm/W	3000K	>90	50.000 Hrs	250mA
5200.125.24.Δ	DtW	Bridgelux	750lm	10W	75lm/W	1800-3000K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DTW</span>	>90	50.000 Hrs	250mA