






STICK TRIMLESS

PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS	○ 3 = RAL 9003 white
BEAM ANGLE	▲ 24°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	Ø90 X 85mm



OPTIONS

OPTIONAL BEAM ANGLE	▲ 36° Art. no.: 4912.010.36.0
ANTI-GLARE RING	Black anti-glare ring Included
	White anti-glare ring Art. no.: 4912.922.99.3
	Gold anti-glare ring Art. no.: 4912.922.99.9
GLASS	Prismatic Art. no.: 4912.933.94.0
	Frosted Art. no.: 4912.933.90.0
	Striped Art. no.: 4912.933.96.0
HONEYCOMB	Art. no.: 4912.933.91.0
DRIVER OPTIONS	On/off 500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut 500mA 5-10W Art. no.: 0110.500.30.1
	1/10V 500mA 5-10W Art. no.: 0110.500.30.1
	DALI 500mA 4-18W Art. no.: 0118.500.40.0 Max. 2 fixtures connected in serie per driver
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

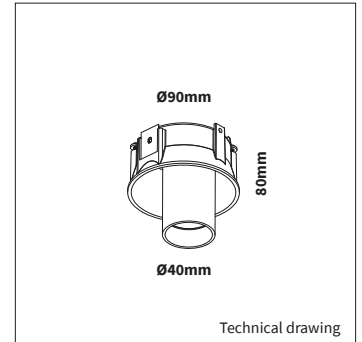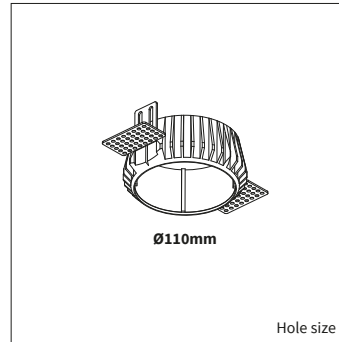

ANTI-GLARE RING



GLASS



HONEYCOMB



INFORMATION

Always select a driver option and add the selected driver to your order.
Full warranty only applies when fixture is purchased in combination with recommended driver.

Including recessed frame

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4918.500.24.3	V8 Array	Bridgelux	994lm	9W	110lm/W	2700K	>90	35.000 Hrs	500mA