






<b>PRODUCT MATERIAL</b>	Die-cast Aluminium
<b>LIGHT SOURCE</b>	Bridgelux V8 Array
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>STANDARD DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS</b>	<ul style="list-style-type: none"> <li>● <b>35</b> = RAL 9003 white + RAL 9005 black</li> <li>● <b>5</b> = RAL 9005 black</li> </ul>
<b>BEAM ANGLE</b>	 <b>24°</b>
<b>ADJUSTABLE</b>	Yes - 0-20° - 360°
<b>SIZE</b>	Ø92 X 55mm



## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	 <b>36°</b> Art. no.: 4912.010.36.0
<b>ANTI-GLARE RING</b>	<b>Black</b> Included
	<b>White</b> Art. no.: 4912.922.99.3
	<b>Gold</b> Art. no.: 4912.922.99.9
<b>GLASS</b>	<b>Prismatic</b> Art. no.: 4912.933.94.0
	<b>Frosted</b> Art. no.: 4912.933.90.0
	<b>Striped</b> Art. no.: 4912.933.96.0
<b>HONEYCOMB</b>	Art. no.: 4912.933.91.0
<b>DRIVER OPTIONS</b>	<b>On/off</b> 500mA 6-10W Art. no.: 0110.500.10.0
	<b>Phase cut</b> 500mA 5-10W Art. no.: 0110.500.20.7
	<b>DALI</b> 500mA 4-18W Art. no.: 0118.500.40.0
	<b>Max. 2 fixtures connected in serie per driver</b>
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

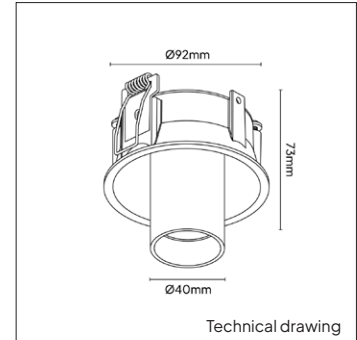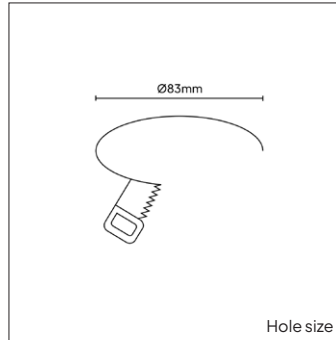

### ANTI-GLARE RING



Black

White

Gold

### GLASS



Striped

Frosted

Prismatic

### HONEYCOMB



Honeycomb

## INFORMATION

Always select a driver option and add the selected driver to your order.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4917.500.24.Δ	V8 Array	Bridgelux	938lm	9W	104lm/W	2700K	>90	50.000 Hrs	500mA

Δ See colors