




| | |
|-------------------------|---|
| PRODUCT MATERIAL | Steel |
| LIGHT SOURCE | LMR50 |
| MODULE LIFETIME | Approx. 30.000 hours |
| DRIVER | Excluding driver, SELECT OPTION |
| COLORS (Δ) | <input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black |
| BEAM ANGLE | |
| ADJUSTABLE | Yes |
| SIZE | See technical drawing |

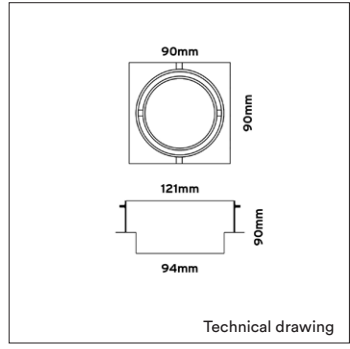

OPTIONS LMR50

| | |
|---|---|
| GLASS COVER CLEAR | Glass IP44 Art. no.: 0053.999.99.0 |
| DRIVER OPTIONS | On/off 350mA 6-10W Art. no.: 0110.350.10.3 |
| | Phase cut 350mA 1-7W Art. no.: 0107.350.20.2 |
| | DALI 350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver |
| POWER CABLE OPTIONS Connected to driver/fixture | Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 |
| | Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 |
| | Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0 |

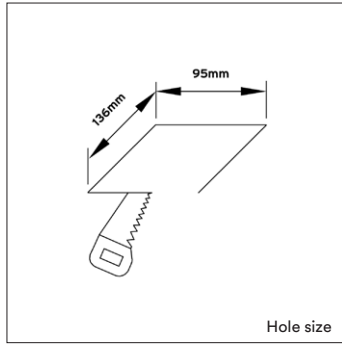

INFORMATION

Including recessed frame

Always select a driver option and add the selected driver to your order.

- Full warranty only applies when fixture is purchased in combination with recommended driver.
- Allow for extra space behind recessed frame to install driver

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | BEAM ANGLE | mA | |
|----------------|-----------|---------------|---------------|--------------|-------------------|-------------------|-----|-------------|------------|-------|-------|
| Δ See colors | | | | | | | | | | | |
| 4609.171.20.Δ | LMR50 | Bridgelux V6 | 575lm | 6,8W | 85lm/W | 2700K | >90 | 30.000 Hrs | 20° | 350mA | |
| 4609.172.30.Δ | LMR50 | Bridgelux V6 | 575lm | 6,8W | 85lm/W | 2700K | >90 | 30.000 Hrs | 30° | 350mA | |
| 4609.173.20.Δ | LMR50 | Bridgelux V6 | 600lm | 6,8W | 85lm/W | 3000K | >90 | 30.000 Hrs | 20° | 350mA | |
| 4609.174.30.Δ | LMR50 | Bridgelux V6 | 600lm | 6,8W | 85lm/W | 3000K | >90 | 30.000 Hrs | 30° | 350mA | |
| 4609.275.20.Δ | LMR50 | Bridgelux DtW | 535lm | 7W | 77lm/W | 1800-3000K | | 95 | 30.000 Hrs | 20° | 350mA |
| 4609.276.30.Δ | LMR50 | Bridgelux DtW | 535lm | 7W | 77lm/W | 1800-3000K | | 95 | 30.000 Hrs | 30° | 350mA |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.