


KEYLIGHT

VENUS P

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux BXRV
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	 45°
ADJUSTABLE	Yes
SIZE	Ø72 X 92mm




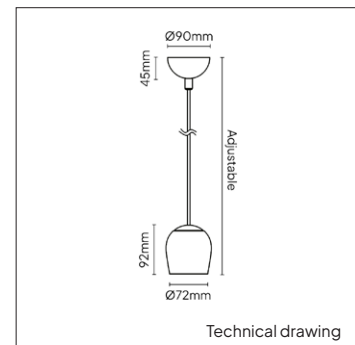
OPTIONS

ANTI-GLARE RING	Black	Included
	Gold	Art. no.: 3067.030.00.9
HONEYCOMB	Art. no.: 3067.040.00.0	
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee	

INFORMATION

This fixture is supplied as standard with 5 meters of cable. You can easily shorten it to the desired length yourself.

 Design Patent Certificate
No. ZL 2019 3 0427875.3 Surface Mount Venus Patent



ANTI-GLARE RING




Black

Gold

HONEYCOMB



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5816.500.45.Δ	BXRV	Bridgelux	800lm	14W	57lm/W	1800-3000K 	>90	50.000 Hrs	350mA

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.