

KEYLIGHT

VENUS R MICRO TRIMLESS



PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	▲ 24°
ADJUSTABLE	Rotating 350°, 55° tiltable
SIZE	Ø49 X 62mm



OPTIONS

OPTIONAL BEAM ANGLE 2700K	▲ 15°	Art. no.: 5818.020.15.0
	▲ 36°	Art. no.: 5818.020.36.0
	▲ 50°	Art. no.: 5818.020.50.0
OPTIONAL BEAM ANGLE DTW	▲ 36°	Art. no.: 4063.020.36.0
	▲ 50°	Art. no.: 4063.020.60.0
ANTI-GLARE RING	Black	Included
	Gold	Art. no.: 5818.030.00.9
HONEYCOMB	Art. no.: 5818.040.00.0	
DRIVER OPTIONS	DALI	350mA 3-9W Art. no.: 0109.350.40.1 Size: 166 x 30 x 22mm
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

Design Patent Certificate
No: ZL 2019 3 0427879.1 Recessed Mount Venus Patent

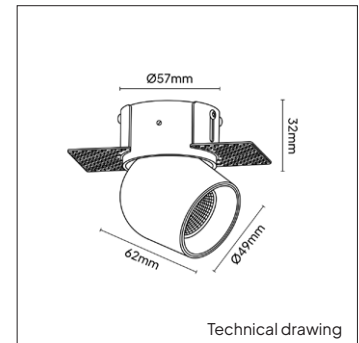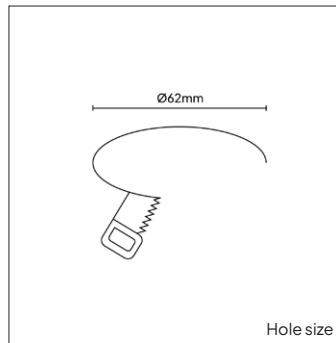

INFORMATION


Including plaster kit

- ⚠ Pay attention at the inner size (Ø46mm) of the frame, as the chosen driver needs to fit through this hole.
- ⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.

ANTI-GLARE RING



HONEYCOMB

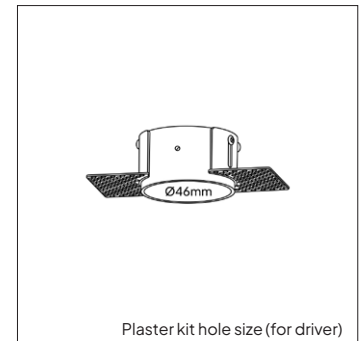

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4063.270.24.Δ	COB	Bridgelux	526lm	7W	75lm/W	2700K	>90	50.000 Hrs	350mA
4063.125.24.Δ	DtW	Bridgelux	519lm	7W	74lm/W	1800 - 3000K	DTW >90	50.000 Hrs	350mA