

# KEYLIGHT

# VENUS T MINI



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	3-phase track adapter driver
<b>LIGHT SOURCE</b>	Bridgelux DtW
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Rotating 350°, 90° tiltable
<b>DIMMABLE</b>	Yes
<b>SIZE</b>	Ø59 x 73mm




## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	▲ 36°	Art. no.: 3066.010.36.0
	▲ 50°	Art. no.: 3066.010.50.0
<b>ANTI-GLARE RING</b>	<b>Black</b>	Included
	<b>Gold</b>	Art. no.: 3066.030.00.9
<b>HONEYCOMB</b>		Art. no.: 3066.040.00.0

## INFORMATION

Also available in surface and recessed version

Design Patent Certificate  
No: ZL 2019 5 0427886.1 Trackspot Venus Patent

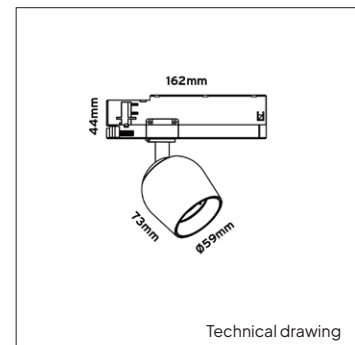

### ANTI-GLARE RING



### HONEYCOMB



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
3066.125.24.Δ	DtW	Bridgelux	900lm	10W	90lm/W	1800-3000K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DtW</span>	>90	50.000 Hrs	250mA

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.