





<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including Philips Xitanium driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	3391mm (see technical drawing)

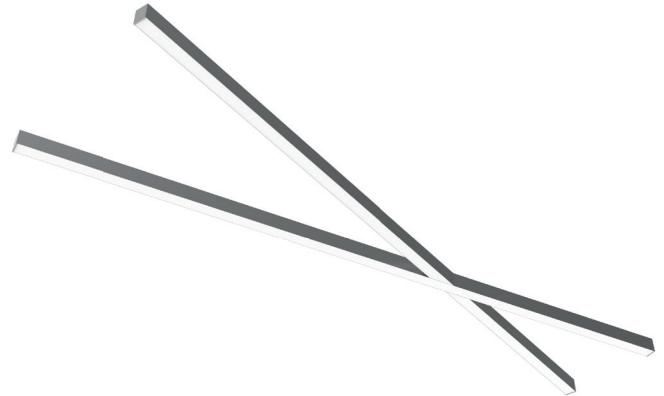

**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>EMERGENCY BALLAST</b>	Art. nr.: 0187.003.01.0 - 1 hour
<b>DIMMABLE</b>	DALI dimmable <span style="float: right;">On request</span>
<b>DIFFUSER</b>	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request
<b>UGR DIFFUSER</b>	UGR<19 diffuser on request
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request

PROFILE V

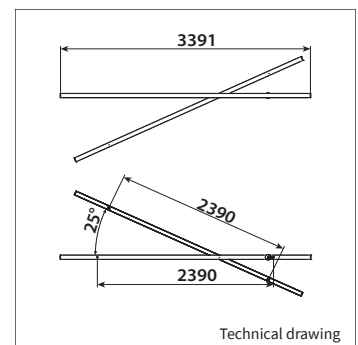

Technical drawing


**INFORMATION**

<b>WARRANTY</b>	5 Years
-----------------	---------

Suspended, standard 1,5m steel wire suspension included

We can produce this luminaire in different lengths and shapes on request

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



White acrylic    Acrylic frosted    Microprismatic

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME
Δ see colos								
9261.239.30.Δ	Ledline	Philips	26400lm	172W	154lm/W	3000K	>80	50.000 Hrs
9261.239.40.Δ	Ledline	Philips	26400lm	172W	154lm/W	4000K	>80	50.000 Hrs