



RIBBLE

PRODUCT MATERIAL	Die-casting aluminium
LIGHT SOURCE	Lumileds 3030
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Including driver
COLORS	● 7 = RAL 9007 dark grey
BEAM ANGLE	▲ 120°
SIZE	149,8 X 241,7mm



INFORMATION

WARRANTY	3 years
-----------------	---------


IK10 strong protection, good optical function

Operation temperature: -20 ~ -50°C

Including daylight sensor: Turn on light level 50 Lux
Turn off light level > 150 Lux

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

RIBBLE

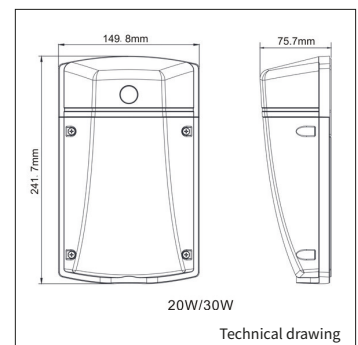

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME
8251.020.00.7	3030	Lumileds	2200lm	20W	110lm/W	4000K	>80	35.000 Hrs
8251.030.00.7	3030	Lumileds	3300lm	30W	110lm/W	4000K	>80	35.000 Hrs