



SLIMMY 30 P / 50 P



<b>PRODUCT MATERIAL</b>	Steel and aluminium
<b>LIGHT SOURCE</b>	Philips LED module
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
<b>REFLECTOR</b>	Aluminium white
<b>SIZE</b>	300/500 X 90mm



**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>EMERGENCY BALLAST</b>	Art. no.: 187.003.01.0 - 1 hour
<b>DIMMABLE</b>	DALI dimmable
<b>DIFFUSER</b>	White opalic diffuser in standard microprismatic or any other on request
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request




SLIMMY 30 P / 50 P

**INFORMATION**

<b>WARRANTY</b>	3 Years
-----------------	---------

1,5m steel wire suspension set standard (with wire control length)

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

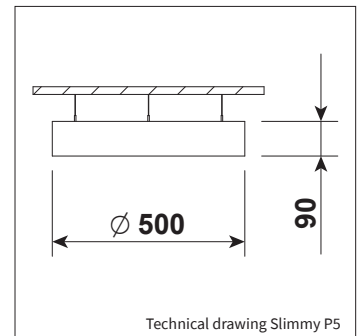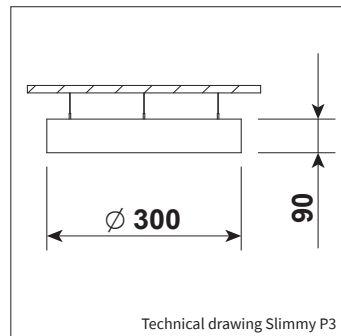

ART.NR.	LAMP TYPE	BRAND	LIGHT OUTPUT	MODULE POWER	MODULE EFFICIENCY	CORRELATED COLOUR TEMPERATURE	COLOUR RENDERING INDEX	TC LIFE
<b>SLIMMY 30 P</b>								
Δ see colors								
7730.030.30.Δ	LED module	Philips	2300lm	22W	105lm/W	3000K	>80	50.000 Hrs
7730.030.40.Δ	LED module	Philips	2300lm	22W	105lm/W	4000K	>80	50.000 Hrs
<b>SLIMMY 50 P</b>								
7730.050.30.Δ	LED module	Philips	4200lm	41W	102lm/W	3000K	>80	50.000 Hrs
7730.050.40.Δ	LED module	Philips	4200lm	41W	102lm/W	4000K	>80	50.000 Hrs