



VENUS T MINI



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	3-phase track adapter
<b>LIGHT SOURCE</b>	Bridgelux DtW
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	24°
<b>ADJUSTABLE</b>	Rotating 350°, 90° tiltable
<b>DIMMABLE</b>	Yes
<b>SIZE</b>	73 X 59mm



OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	36° art. no.: 3066.010.36.0
	50° art. no.: 3066.010.50.0
<b>ANTI-GLARE RING</b>	Gold mat anti-glare ring art. no.: 3066.030.00.9
<b>HONEYCOMB</b>	Art. no.: 3066.040.00.0

INFORMATION


<b>WARRANTY</b>	5 Years
-----------------	---------

Also available in surface and recessed version

Including standard black anti-glare ring

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

VENUS T MINI

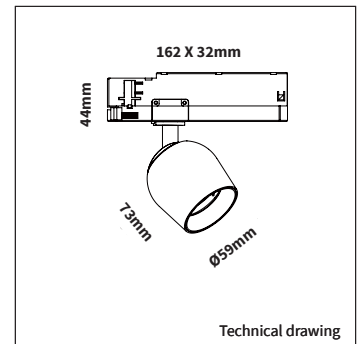

Technical drawing



Anti-glare ring



Honeycomb

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
3066.125.24.Δ	DtW	Bridgelux	900lm	10W	90lm/W	1800-3000K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DTW</span>	>90	50.000 Hrs	250mA

Δ see colors