


## MODEL: LUXX 2



RoHS

IP20

ITEM NO: 4394.Δ

### IMPORTANT NOTICE

1. To prevent electric shock, turn off electricity at fuse box before installing the lighting fixture, adding or changing accessory.
2. Ensure a distance of 75mm away from the lighting fixture for air ventilation and make sure to obey all fire regulations.
3. The distance between the lighting fixture and to be lighted up object must be at least 500mm.
4. Do not touch the lighting fixture when in use.
5. Do not cover the lighting fixture by any material at any time.
6. When installing or using this lighting fixture, basic safety precautions should always be followed.
7. Please refer to a qualified engineer if you have any questions by installation.
8. According to the EU Directive WEEE (Waste Electrical and Electronic Equipment) the luminaire must not be disposed of via incinerated waste. It must be sent to the respective local facility for disposal and/or the recycling of electronic products.

### INSTALLATION INSTRUCTIONS


1. See diagram below, cut installation hole on the ceiling, cut-size 165 X 165mm
2. Plug in the input supply wire to the ballast quick connector (see pic. 1)
3. Push the brackets upwards and insert the fixture to the hole (see pic. 2)
4. When the fixture is safely mounted in the hole, use your finger to lower the brackets.

**It's important to lower the brackets prior to tightening the screws. There is a high risk of breaking the brackets when they are still pointing upwards.**


5. Once you have lowered the brackets, tighten the screws manually and clockwise with a screwdriver (see pic. 4)

**Please be aware that the screws are painted, be careful when tightening the screws!**


6. Once the fixtures is properly installed, turn on the powersupply.

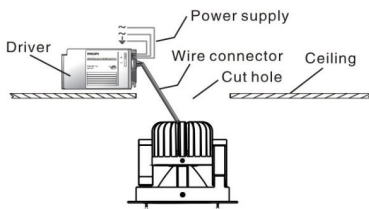


(1)



(2)

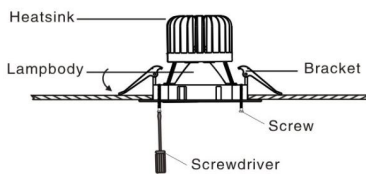

(3)



(4) ! Attention See point 5.

! Attention See point 4.