






PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Citizen CLU701
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	24°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	64 X 64 X 100mm



OPTIONS

OPTIONAL BEAM ANGLE	Art. no.: 4930.010.33.0
	Art. no.: 4930.010.44.0
ANTI-GLARE RING	Black anti-glare ring Included
	Gold anti-glare ring Art. no.: 4930.030.00.9
DRIVER OPTIONS	On/off 250mA 6-10W Art. no.: 0115.250.10.0
	Phase cut 250mA 7-10W Art. no.: 0110.250.20.4
	1/10V 250mA 1-14W Art. no.: 0114.250.30.0
	DALI 250mA 6-13W Art. no.: 0114.250.40.1
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

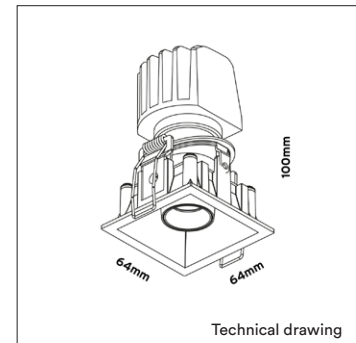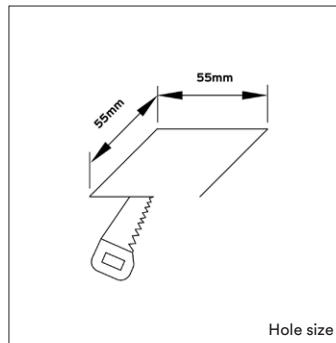

INFORMATION

Always select a driver option and add the selected driver to your order.

Full warranty only applies when fixture is purchased in combination with recommended driver.

ANTI-GLARE RING



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4931.250.24.Δ	CLU701	Citizen	770lm	7,5W	102lm/W	2700K	>90	35.000 Hrs	250mA
4931.300.24.Δ	CLU701	Citizen	828lm	7,5W	110lm/W	3000K	>90	35.000 Hrs	250mA

Δ See colors