



MITO R TRIMLESS

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Citizen CLU701
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	30°
ADJUSTABLE	No
SIZE	Ø57 X 95mm



OPTIONS



DRIVER OPTIONS	On/off	250mA 7-13W Art. no.: 0115.250.10.0
	Phase cut	250mA 7-10W Art. no.: 0110.250.20.4
	1/10V	250mA 1-14W Art. no.: 0114.250.30.0
	DALI	250mA 6-13W Art. no.: 0114.250.40.1
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

INFORMATION

Always select a driver option and add the selected driver to your order.
Full warranty only applies when fixture is purchased in combination with recommended driver.

Including recessed frame

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

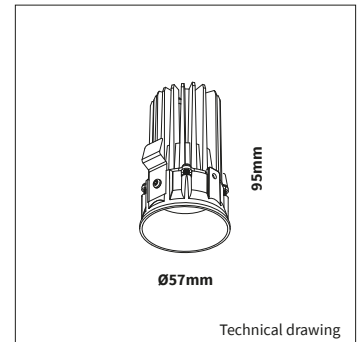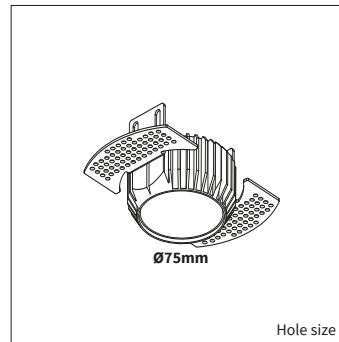

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
4982.250.30.Δ	CLU701	Citizen	770lm	7,5W	102lm/W	2700K	>90	35.000 Hrs	250mA