

KEYLIGHT



STICK XL

PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	Bridgelux V10C
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	35°
ADJUSTABLE	Yes - 0-45° - 350°
SIZE	Ø110 X 136mm



OPTIONS


OPTIONAL BEAM ANGLE	22°	Art. no.: 3056.010.22.0
	50°	Art. no.: 3056.010.50.0
ANTI-GLARERING	Black	Included
	Gold	Art. no.: 3056.922.99.9
HONEYCOMB	Art. no.: 3056.933.94.0	
DRIVER OPTIONS	On/off	350mA 11-16W Art. no.: 0116.350.10.3
	Phase cut	350mA 6-13W Art. no.: 0113.350.20.1
	1/10V	350mA 0-15W Art. no.: 0115.350.30.0
	DALI	350mA 3-18W Art. no.: 0118.350.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

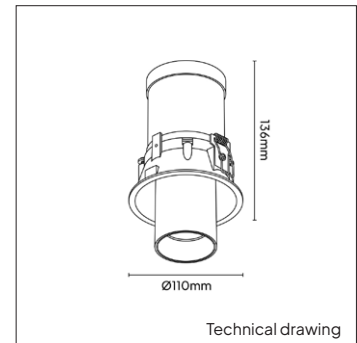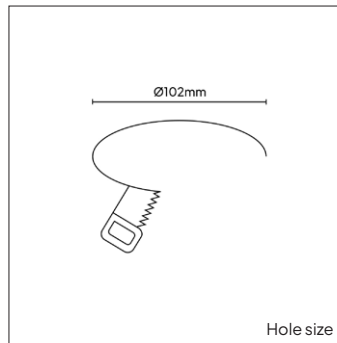

INFORMATION

Always select a driver option and add the selected driver to your order.

⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.



ANTI-GLARERING



HONEYCOMB



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4920.179.35.Δ	V10C LED	Bridgelux	1321lm	12.2W	108lm/W	2700K	>90	50.000 Hrs	350mA
4921.179.35.Δ	V10C LED	Bridgelux	1535lm	12.2W	126lm/W	3000K	>90	50.000 Hrs	350mA

Δ See colors