



PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
CCOLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	601/882/1163/1444 X 48 X 48mm



PROFILE 5 R

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
EMERGENCY BALLAST	Art. nr.: 0187.003.01.0 - 1 hour
DIMMABLE	DALI dimmable
DIFFUSER	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request
UGR DIFFUSER	UGR<19 diffuser on request
IP CLASS	IP20 in standard, IP44 on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request



INFORMATION

WARRANTY	5 Years
-----------------	---------

This luminaire can be mounted directly in to the ceiling and can be connected to form long LED lighting lines. Mounting brackets included.

We can produce this luminaire in different lengths and shapes on request

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

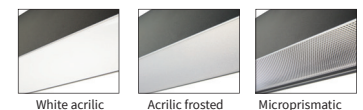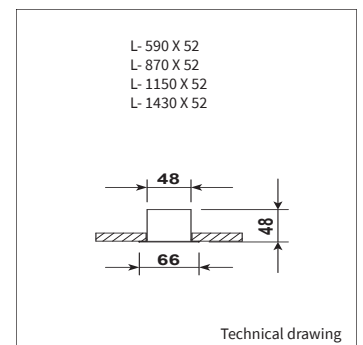

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	LENGTH
Δ see colors									
9268.601.30.Δ	Ledline	Philips	2200lm	15W	147lm/W	3000K	>80	50.000 Hrs	601mm
9268.601.40.Δ	Ledline	Philips	2200lm	15W	147lm/W	4000K	>80	50.000 Hrs	601mm
9268.882.30.Δ	Ledline	Philips	3300lm	23W	143lm/W	3000K	>80	50.000 Hrs	882mm
9268.882.40.Δ	Ledline	Philips	3300lm	23W	143lm/W	4000K	>80	50.000 Hrs	882mm
9268.116.30.Δ	Ledline	Philips	4400lm	29W	152lm/W	3000K	>80	50.000 Hrs	1163mm
9268.116.40.Δ	Ledline	Philips	4400lm	29W	152lm/W	4000K	>80	50.000 Hrs	1163mm
9268.144.30.Δ	Ledline	Philips	5500lm	36W	153lm/W	3000K	>80	50.000 Hrs	1444mm
9268.144.40.Δ	Ledline	Philips	5500lm	36W	153lm/W	4000K	>80	50.000 Hrs	1444mm