




<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux DtW
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	24°
<b>ADJUSTABLE</b>	Rotating 350°, 55° tiltable
<b>DIMMABLE</b>	Yes
<b>SIZE</b>	152 X 62mm



**OPTIONS**

<b>OPTIONAL BEAM ANGLE</b>	<p>36° art. no.: 3066.010.36.0</p> <p>50° art. no.: 3066.010.50.0</p>
<b>ANTI-GLARE RING</b>	Gold mat anti-glare ring art. no.: 3066.030.00.9
<b>HONEYCOMB</b>	Art. no.: 3066.040.00.0
<b>OPTION DRIVERS</b>	<p>Fixed output 250mA 7,5-10W art. no.: 0110.250.20.1</p> <p>Phase-cut dimmable 250mA 7,5-10W art. no.: 0110.250.20.1</p> <p>1/10V dimmable 250mA 11W art. no.: 0111.250.30.0</p> <p>DALI dimmable 250mA 6-13,5W art. no.: 0114.250.40.0</p>

VENUS UNO

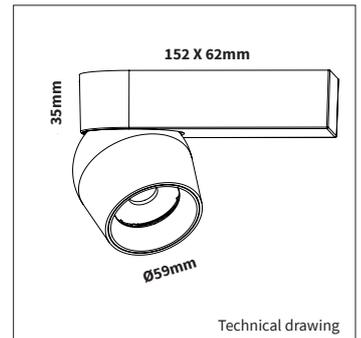

**INFORMATION**

<b>WARRANTY</b>	5 Years
-----------------	---------

Also available in track and recessed version

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic. Full warranty only applies when fixture is purchased in combination with recommended driver.



Anti-glare ring



Honeycomb

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
5066.125.24.Δ	DtW	Bridgelux	900lm	10W	90lm/W	1800-3000K	DTW >90	50.000 Hrs	250mA

Δ see colors